



U3S19XP+H

Product Manual

Jul. 2024

BITMAIN

BITMAIN TECHNOLOGIES INC.

www.bitmain.com

1. Specification

Product Glance	Value			
Model	U3S19XP+H			
Sub	504T	532T	558T	586T
Version	10			
Crypto algorithm/coins	SHA256 BTC/BCH/BSV			
Typical hashrate, TH/s ⁽¹⁻¹⁾	504	532	558	586
Power on wall @35°C ⁽¹⁻²⁾ , Watt ⁽¹⁻¹⁾	9576	10108	10602	10900
Power efficiency on wall@35°C ⁽¹⁻²⁾ , J/T ⁽¹⁻¹⁾	19			
Detailed Characteristics	Value			
Power supply				
Phase	3			
Input voltage, Volt ⁽²⁻¹⁾	380~415			
Input frequency range, Hz	50~60			
Input max current, Amp	24			
Power port	LP34			
Hardware configuration				
Network connection mode	RJ45 Ethernet 10/100M			
Server size (length*width*height, w/o package), mm	790*440*130			
Server size (length*width*height, with package), mm	997*637*252			
Net weight, kg	37			
Gross weight, kg	41			
Environment requirements				
Inlet water temperature, °C	20~50			
Coolant flow, L/min	16.0~20.0			
Coolant pressure, bar	≤3.5			
Working coolant ⁽²⁻²⁾	Antifreeze/ Deionized water/ Pure water			
Coolant pH value	Antifreeze: 7.0~9.0 Prue water: 6.5~7.5 Deionized water: 8.5~9.5			
Diameter of coolant pipe connector, mm	OD14			
Storage temperature, °C	-20~70			
Operation humidity(non-condensing), RH	10~90%			

Notes:

(1-1) The hashrate value, power on wall, and power efficiency on wall are all typical values. The actual hashrate value fluctuates by ±3%, and the actual power on wall and power efficiency on wall fluctuate by ±5%.



(1-2) Inlet coolant temperature.



(2-1) Caution: Wrong input voltage may cause server damaged.

(2-2) For detailed working coolant use and maintenance instructions, please refer to "ANTSPACE HK3 Water Cooling Container & Dry-Wet Tower Product Manual", Chapter 9, Article 3, Point 6, "Maintenance of Coolant"!


2. Performance Curve

(1) Hashrate vs. Inlet Coolant Temperature

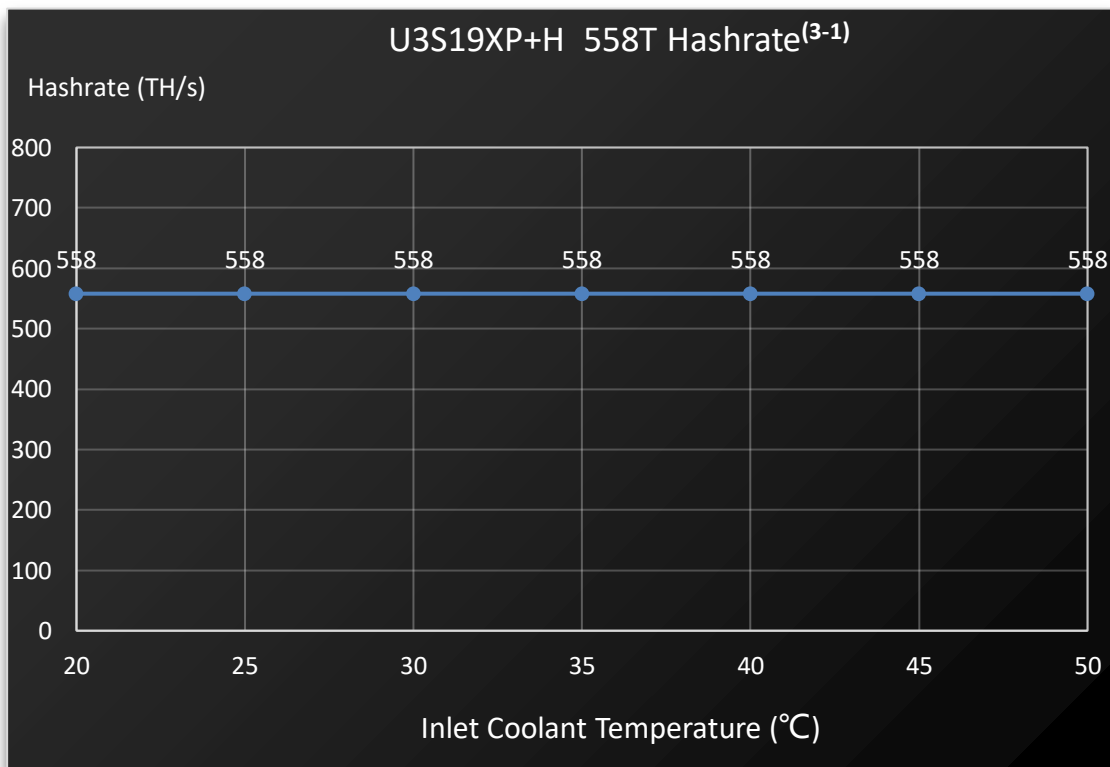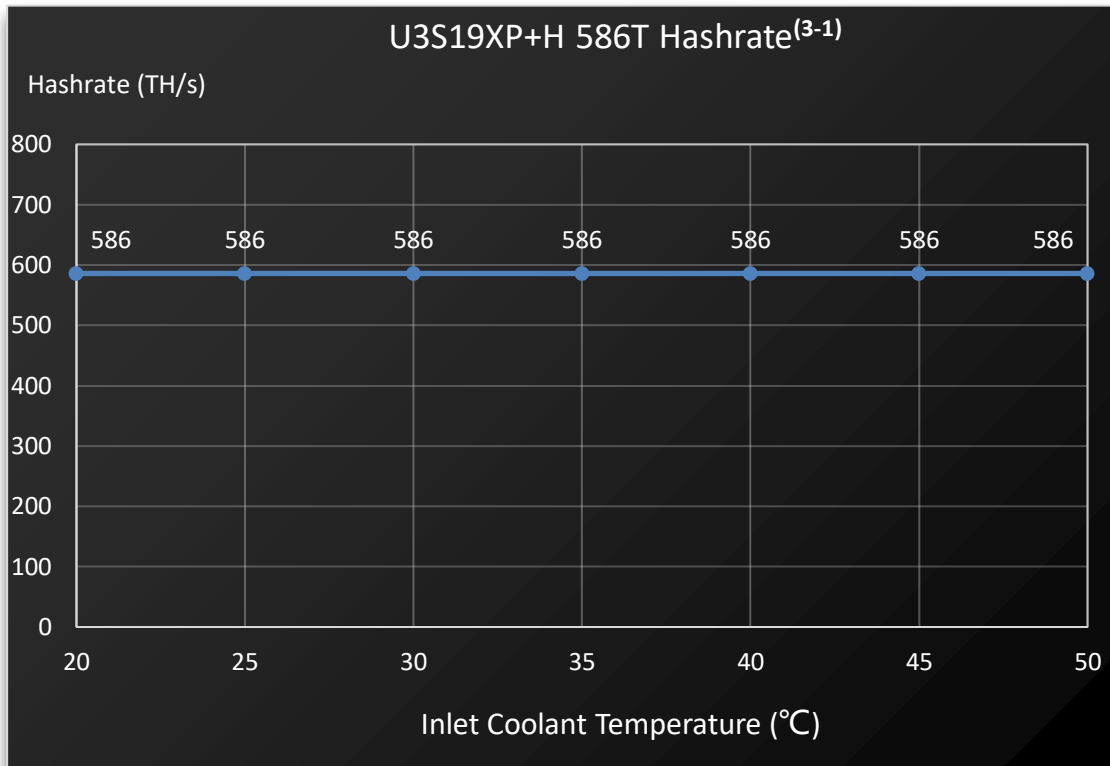

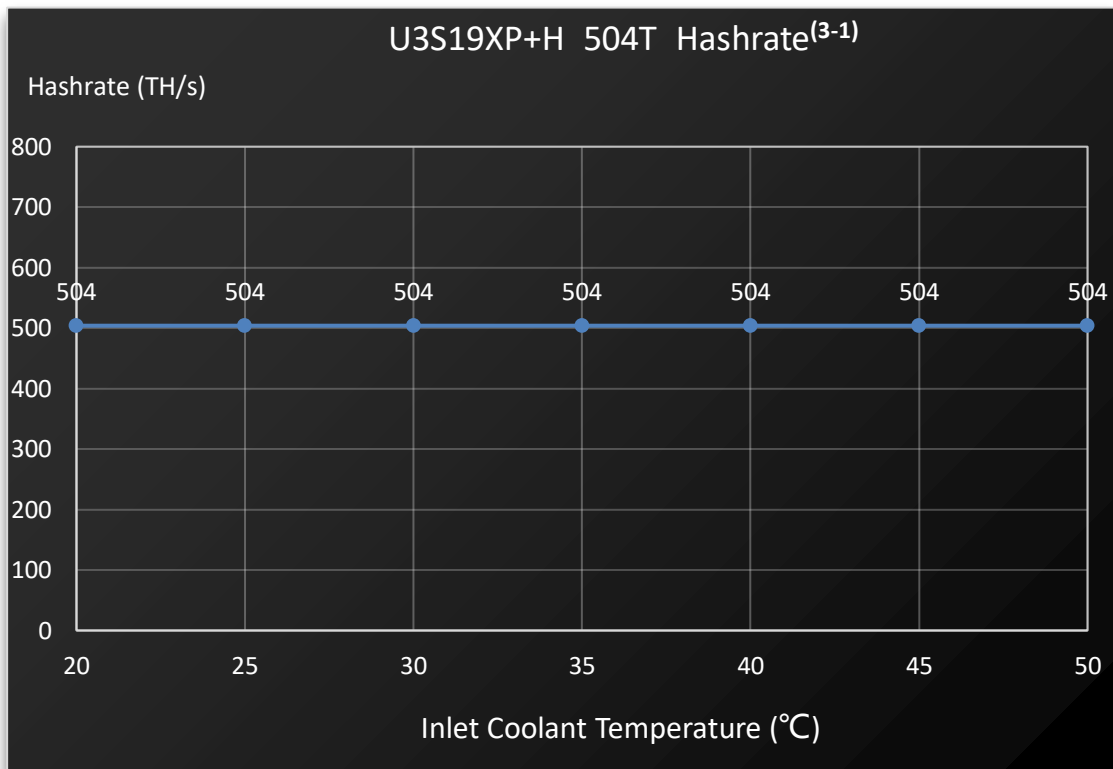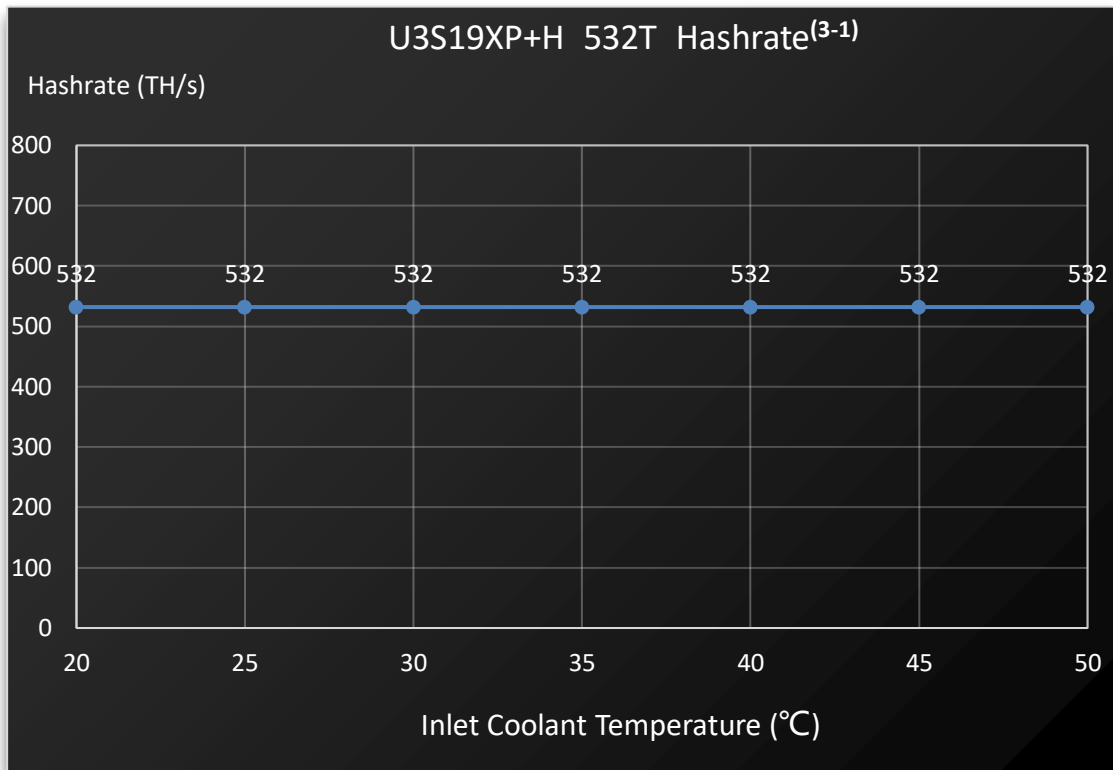

(2) Power Efficiency vs. Inlet Coolant Temperature

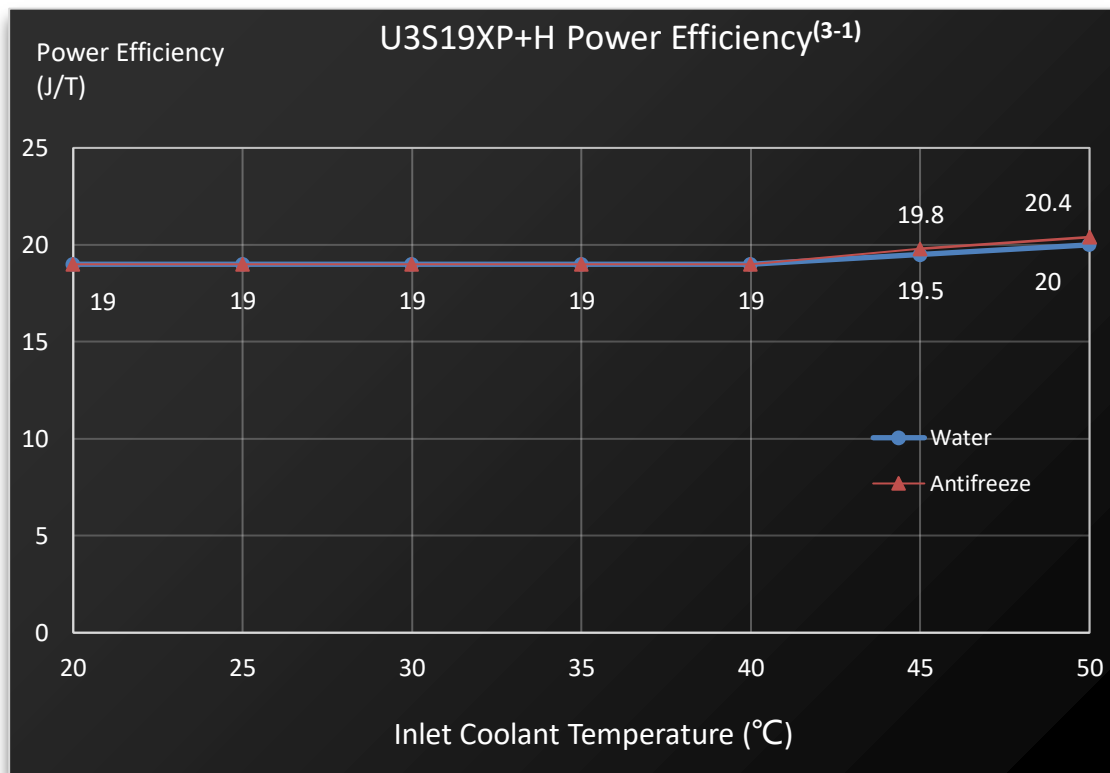

(3-1) The hashrate value, and power efficiency on wall are all typical values. The actual hashrate value fluctuates by $\pm 3\%$, and the actual power efficiency on wall fluctuate by $\pm 5\%$.

3. Product Port

