



S19e XP Hyd.

Product Manual

Jul. 2024

BITMAIN

BITMAIN TECHNOLOGIES INC.

www.bitmain.com

1. Specification

Product Glance	Value	
Model	S19e XP Hyd.	
Sub	251T	240T
Version	10	
Crypto algorithm/coins	SHA256 BTC/BCH/BSV	
Typical hashrate, TH/s⁽¹⁻¹⁾	251	240
Power on wall @35°C ⁽¹⁻²⁾ , Watt⁽¹⁻¹⁾	5522	5280
Power efficiency on wall@35°C ⁽¹⁻²⁾ , J/T⁽¹⁻¹⁾	22	

Detailed Characteristics	Value
Power supply	
Phase	3
Input voltage, Volt⁽²⁻¹⁾	380~415
Input frequency range, Hz	50~60
Input max current, Amp	12
Hardware configuration	
Network connection mode	RJ45 Ethernet 10/100M
Server size (length*width*height, w/o package), mm	410*170*209
Server size (length*width*height, with package), mm	570*316*430
Net weight, kg	12.8
Gross weight, kg	14.1
Environment requirements	
Inlet coolant temperature, °C	20~50
Coolant flow, L/min	8.0~10.0
Coolant pressure, bar	≤3.5
Working Coolant ⁽²⁻²⁾	Antifreeze/ Pure water/ Deionized water
Coolant pH value	Antifreeze: 7.0~9.0 Pure water: 6.5~7.5 Deionized water: 8.5~9.5
Diameter of Coolant pipe connector, mm	OD10
Storage temperature, °C	-20~70
Operation humidity(non-condensing), RH	10~90%

Notes:

(1-1) The hashrate value, power on wall, and power efficiency on wall are all typical values. The actual hashrate value fluctuates by $\pm 3\%$, and the actual power on wall and power efficiency on wall fluctuate by $\pm 5\%$.



(1-2) Inlet coolant temperature.



(2-1) Caution: Wrong input voltage may cause server damaged.

(2-2) For detailed working coolant use and maintenance instructions, please refer to "**ANTSPACE HK3 Water Cooling Container & Dry-Wet Tower Product Manual**", Chapter 9, Article 3, Point 6, "Maintenance of Coolant"!

2. Performance Curve

(1) Hashrate vs. Inlet Coolant Temperature

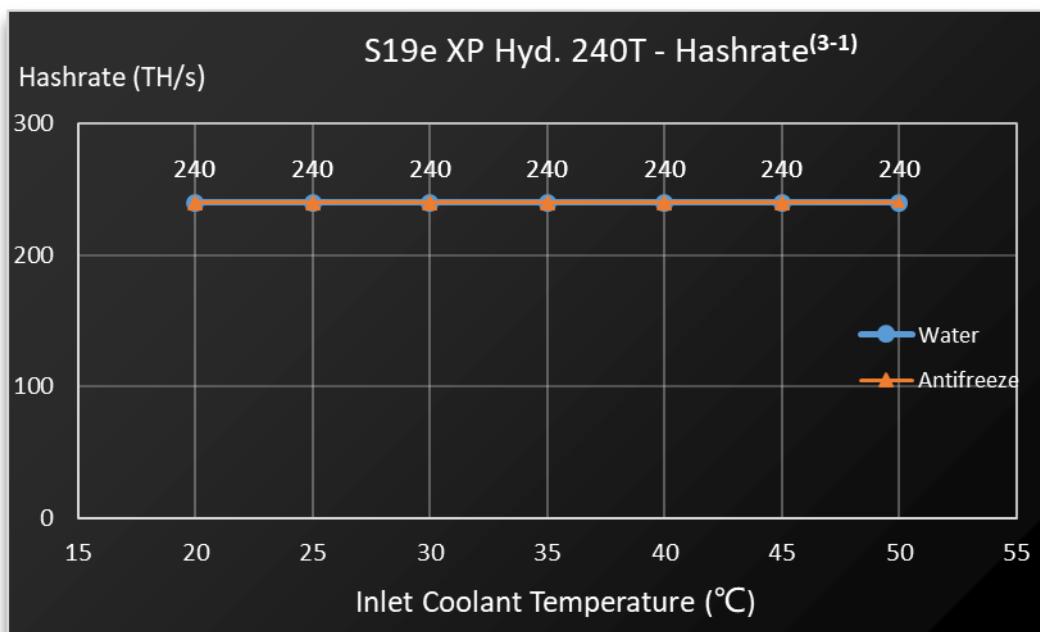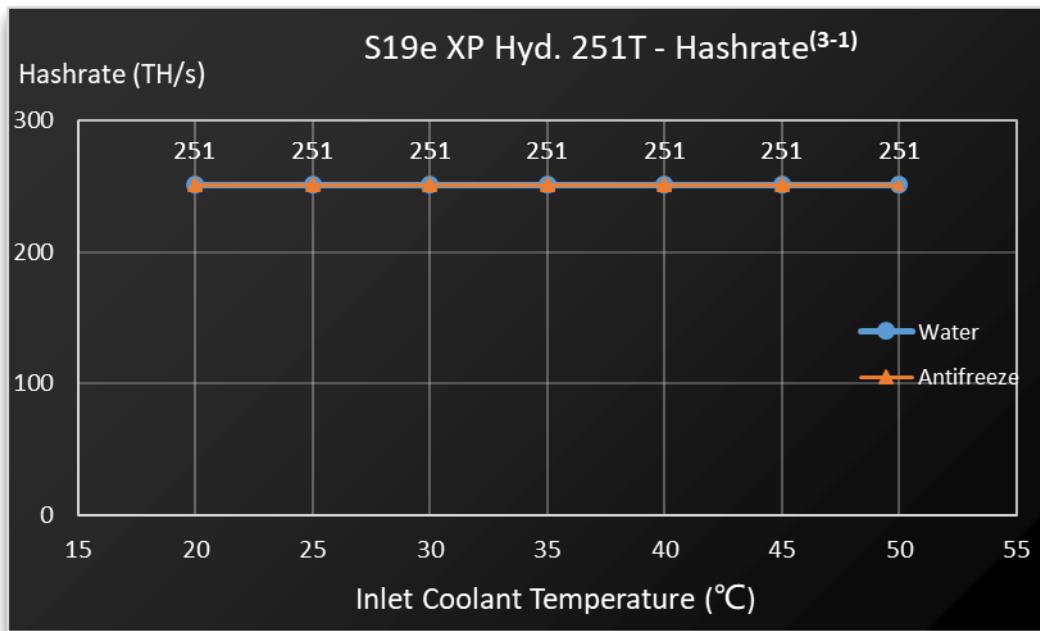

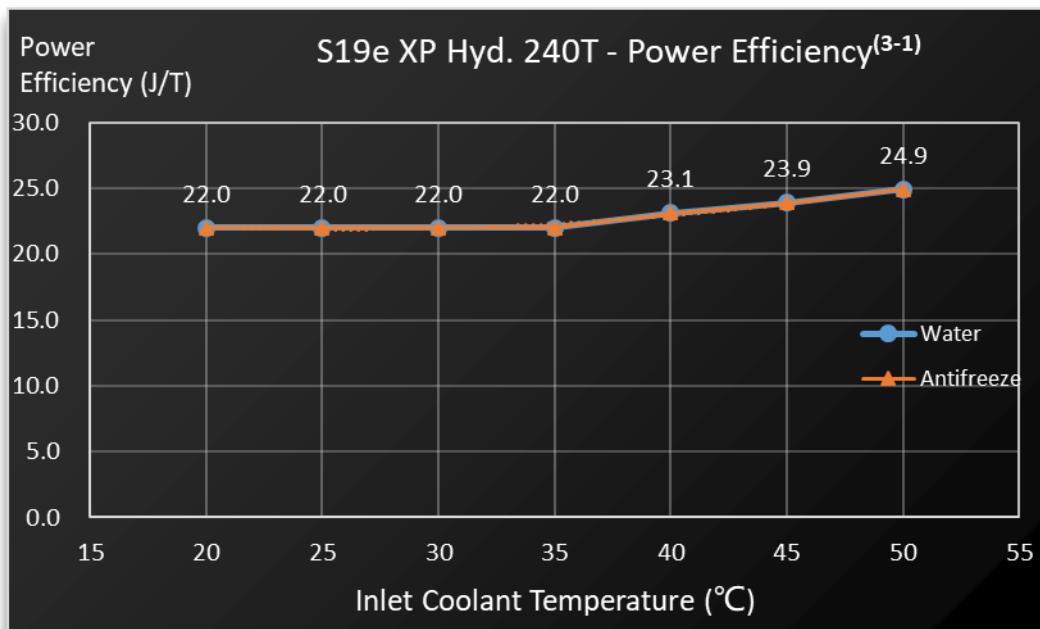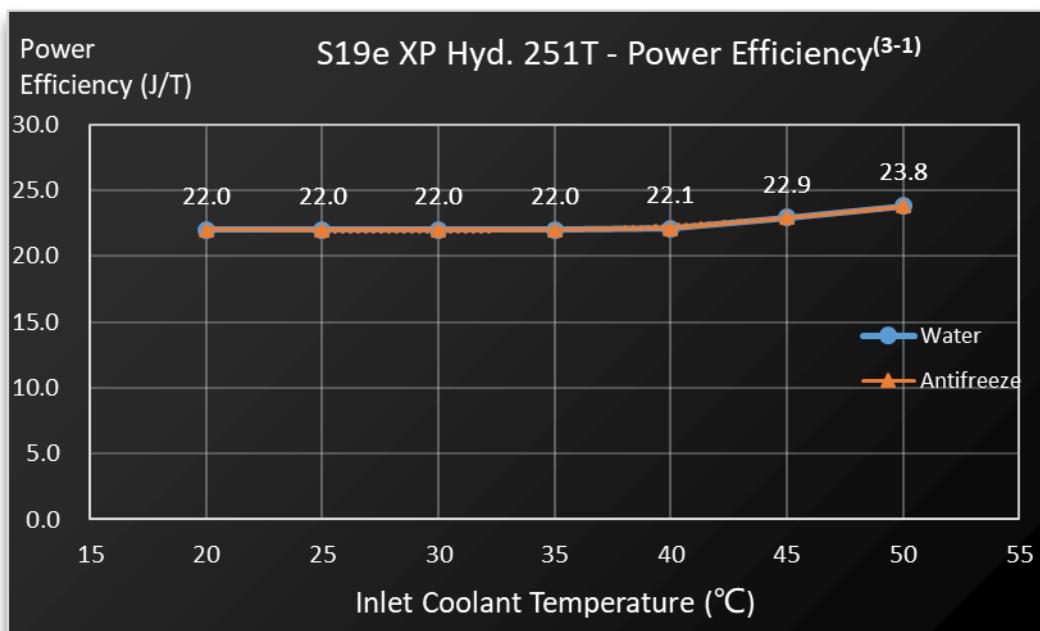(2) Power Efficiency vs. Inlet Coolant Temperature


(3-1) The hashrate value, and power efficiency on wall are all typical values. The actual hashrate value fluctuates by $\pm 3\%$, and the actual power efficiency on wall fluctuate by $\pm 5\%$.