



S21 XP

Product Manual

Oct. 2025

BITMAIN

BITMAIN TECHNOLOGIES INC.

www.bitmain.com

1.Specification

Product Glance	Value
Model	S21 XP
Sub	270T
Version	10
Crypto algorithm/coins	SHA256 BTC/BCH/BSV
Typical Hashrate, TH/s⁽¹⁻¹⁾	270
Power on wall @25°C ⁽¹⁻²⁾ , Watt⁽¹⁻¹⁾	3645
Power efficiency on wall@25°C ⁽¹⁻²⁾ , J/TH⁽¹⁻¹⁾	13.5

Detailed Characteristics	Value
Power supply	
Phase	1
Power supply AC input voltage ⁽²⁻¹⁾ , Volt	220~277
Power supply AC Input Frequency Range, Hz	50~60
Power supply AC Input current ⁽²⁻²⁾ , Amp	20
Hardware Configuration	
Network connection mode	RJ45 Ethernet 10/100M
Server size (Length*Width*Height, w/o package), mm	450*219*293
Server size (Length*Width*Height, with package), mm	630*350*430
Net weight, kg	18.7
Gross weight, kg	21.5
Nosie ⁽²⁻³⁾ @30°C, dBA	76
Max airflow ⁽²⁻⁴⁾ , CFM	550
Environment Requirements	
Operation temperature, °C	-20~45
Storage temperature, °C	-20~70
Operation humidity(no condensation), RH	10%~90%
Operation altitude ⁽²⁻⁵⁾ , m	≤2000

NOTE:

(1-1) The Hashrate value, Power on wall, and Power efficiency on wall are all typical values. The actual Hashrate value fluctuates by $\pm 3\%$, and the actual Power on wall and Power efficiency on wall fluctuate by $\pm 5\%$.

(1-2) Inlet air temperature.

(2-1) Caution: Wrong input voltage may probably cause server damaged.

(2-2) Single-phase AC input 20A.


(2-3) Max condition: Fan is under max RPM(rotation per minute).

(2-4) When the server is dusty or the environment is poorly ventilated, the server airflow will reduce. This may lead to server overheating and potential damage.

(2-5) When the server is used at an altitude from 900m to 2000m, the highest operating temperature decreases by 1°C for every increase of 300m.

2. Performance Curves

(1) Hashrate vs. Ambient Temperature

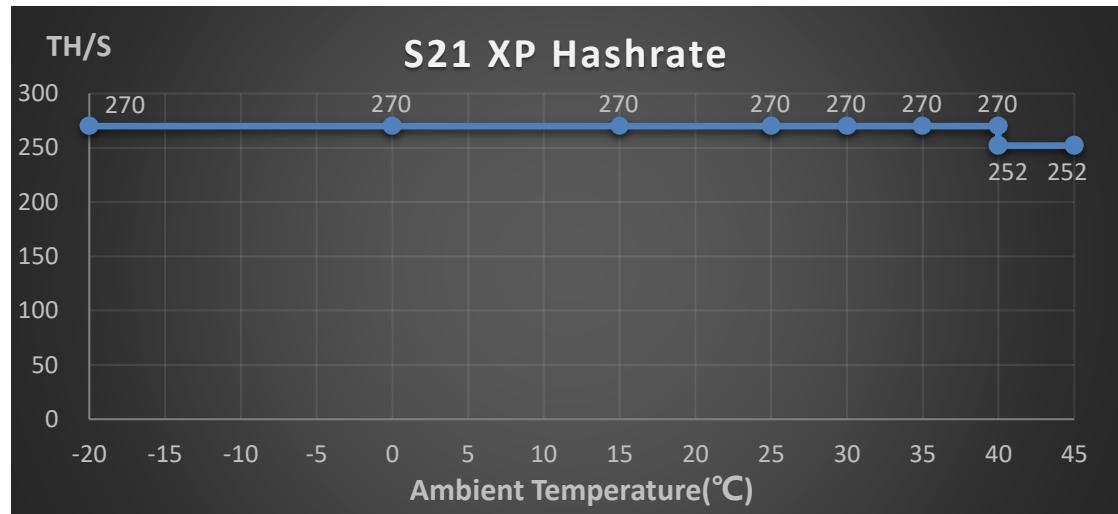

(2) J/T vs. Ambient Temperature

