



Z15 Pro

Product Datasheet

Feb. 2024

BITMAIN

BITMAIN TECHNOLOGIES INC.

www.bitmain.com

1. Specification

Product Glance	Value
Model	Z15 Pro
Version	240-Z
Crypto algorithm Coins	Equihash ZEC/ZEN
Typical Hashrate, Ksol/s ⁽¹⁻¹⁾	840
Power on wall @25°C, W ⁽¹⁻¹⁾	2780
Power efficiency on wall @25°C, J/Ksol ⁽¹⁻¹⁾	3.31


Detailed Characteristics	Value
Power supply	
Power supply AC input voltage range, V ⁽²⁻¹⁾	200-240V AC
Power supply AC Input Frequency Range, Hz	50-60
Power supply AC Input current, A ⁽²⁻²⁾	20
Adapted AC output power requirement, W	4000
Hardware configuration	
Quantity of hash chips	18
Quantity of hash boards	3
Network connection mode	RJ45 Ethernet 10/100M
Server size (Length*Width*Height, w/o package), mm	428*195*290
Server size (Length*Width*Height, with package), mm	597*317*427
Net weight, kg	16.9
Gross weight, kg	18.8
Noise @25°C, dBA ⁽²⁻³⁾	75
Environment requirements	
Operation temperature, °C	0~40
Storage temperature, °C	-20~70
Operation humidity(non-condensing), RH	10%~90%
Operation altitude, m ⁽²⁻⁴⁾	≤2000

Notes:

- (1-1) The Hashrate value, Power on wall, and Power efficiency on wall are all typical values. The actual Hashrate value fluctuates by ±3%, and the actual Power on wall and Power efficiency on wall fluctuate by ±5%.
- (2-1) Caution: Wrong input voltage may cause server damaged.
- (2-2) Two AC input, 10 A per wire.
- (2-3) Max condition: Fan is under max RPM(rotation per minute).
- (2-4) When the miner is used at an altitude from 900m to 2000m, the highest operating temperature decreases by 1°C for every increase of 300m.

2. Performance Curves

(1) Hashrate Vs. Ambient Temperature

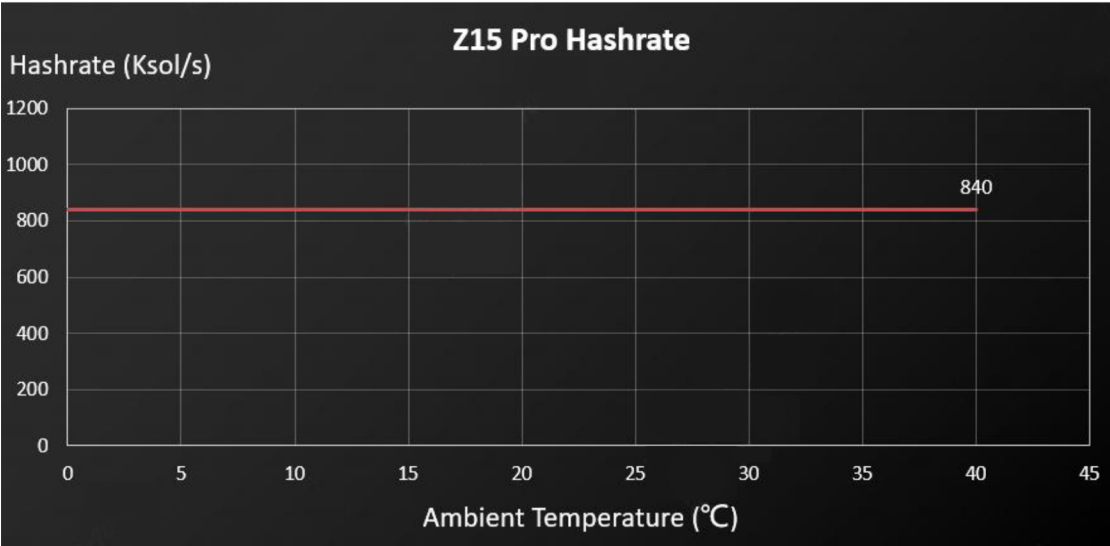

(3) J/Ksol Vs. Ambient Temperature

